






# Anker SOLIX S2000

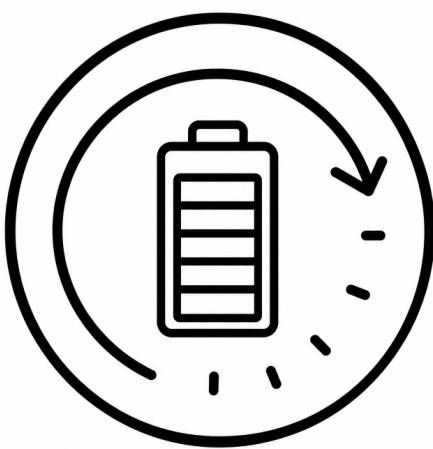

Power That Lasts  
20% Longer

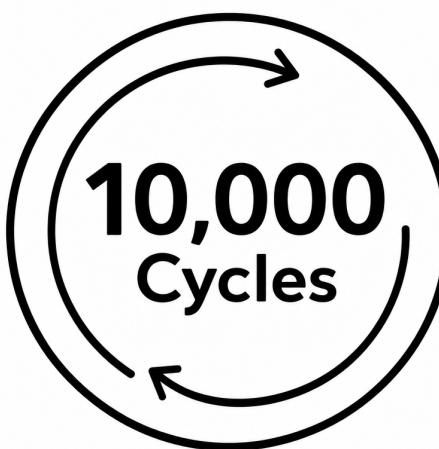

10,000 Battery Cycles,  
15-Year Lifespan

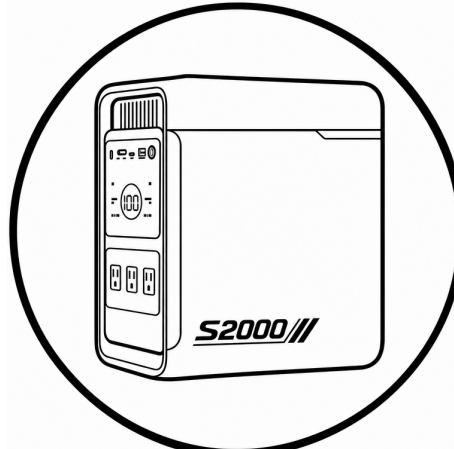

Most Compact  
2kWh Ever

Email: [support@ankersolix.com](mailto:support@ankersolix.com)

Note: Product specifications and details are subject to change without notice.  
Refer to the Anker SOLIX official website for current and accurate information.



LinkedIn



Website



I Anker SOLIX S2000

|                                       |                                                                         |
|---------------------------------------|-------------------------------------------------------------------------|
| Capacity                              | 6.4 Vd.c. / 314Ah, 2,000 Wh                                             |
| Battery Cycles                        | 6,000 (80%), 8,000(70%), 10,000 (60%)                                   |
| AC Input Voltage                      | 220 - 240 V ~ 5.23 A, 50 / 60 Hz                                        |
| AC Input Power (Charging)             | 1,150 W Max                                                             |
| AC Input / Output Power (Bypass Mode) | 2,200 W Max                                                             |
| AC Input Power (Ultra Fast Charging)  | 1,600 W Max                                                             |
| MPPT Input                            | 11V-60V = 12.5A Max. (400W Max.)                                        |
| AC Output Power                       | 230 V ~ 6.52 A, 50 / 60 Hz, 1,500 W Max                                 |
| AC Surge Power                        | 3,000 W                                                                 |
| SurgePad Power                        | 2,600 W                                                                 |
| AC Output Ports                       | 4×                                                                      |
| USB-A Output                          | 5 V = 2.4 A (12 W Max)                                                  |
| USB-C 1 Output                        | 5 V = 3 A (15 W Max)                                                    |
| USB-A + USB-C 1 Output                | 5 V = 3.6 A (18 W Max)                                                  |
| USB-C 2 Output                        | 5V = 3A / 9V = 3A / 15V = 3A / 20 V = 3 A / 20 V = 5 A (100 W Max)      |
| UPS                                   | 10 ms                                                                   |
| Discharging Temperature               | -20°C to 40°C                                                           |
| Charging Temperature                  | 0°C to 40°C                                                             |
| Dimensions                            | 208 × 282 × 323.3 mm                                                    |
| Net Weight                            | 16.2 kg                                                                 |
| Warranty                              | 5 Years                                                                 |
| What’s in the Box                     | Anker SOLIX S2000<br>AC Charging Cable<br>Safety + Warranty Card<br>QSG |





LinkedIn



Website